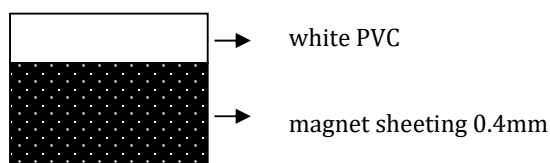
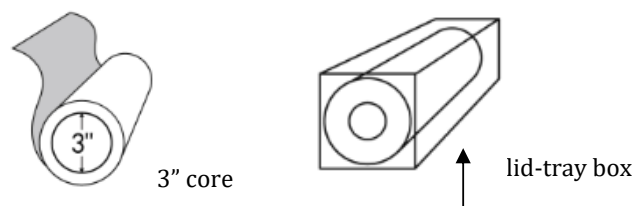


SD MAGNEETTIMATTO 1,27 X 20 m 0,5 mm (SDMF05020127)**FEATURES AND ADVANTAGES:**

- Matte white PVC bonded to magnet sheeting, is compatible for UV curable printing.
- Magnet sheeting is attracted to iron, easy to apply, remove and change, without leaving any residue.
- Without demagnetized, anti-rust

CONSTRUCTION DRAWING:**CUSTOMIZED SIZE:**

30M×610/620×0.5mm total thickness
15M/20M×1000×0.5mm total thickness
20M/25M×1200/1270×0.5mm total thickness
Size can be customized as require

**PACKAGING:****PRINTING INDEX:**

- compatible
Δ testing required
× not compatible

(ECO) SOLVENT	UV CURABLE	LATEX	DYE/PIGMENT	OFFSET/FLEXO	SCREEN PRINT	TONER BASED
Δ	○	×	×	Δ	○	×

MAGNETIC DATA:

Pull Strength: ≥ 17 g/cm²

PHYSICAL DATA:

Total thickness	0.5mm (± 0.05)
Weight	1600g/M ²
Opacity	100%
Water resistance	High

PROCESS AND STORAGE:

- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%.
- Application condition: temperature change is within 40°C daily.
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed, and used up within one month.