


Intercoat MultiStick Decor

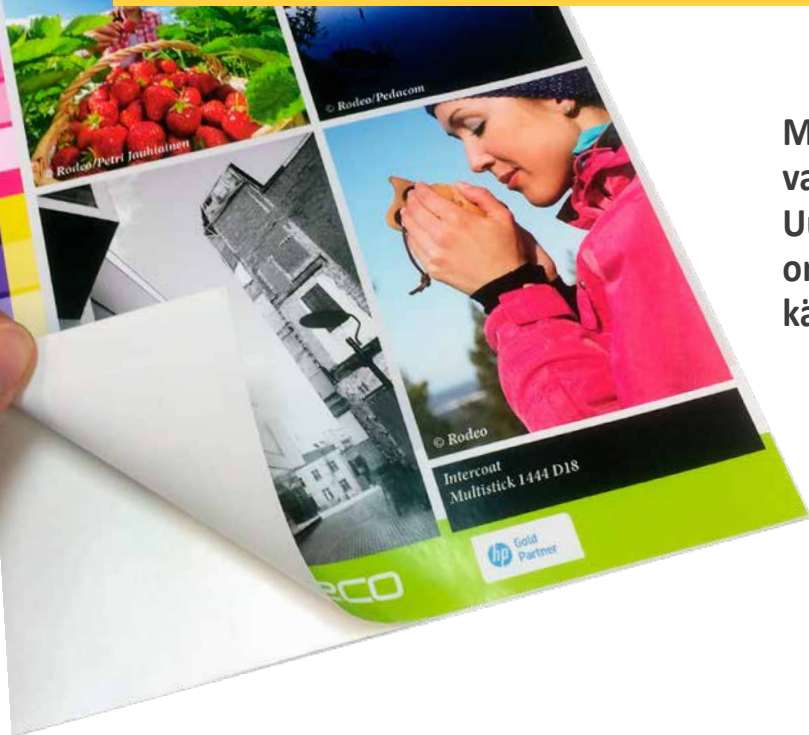

MultiStick on erinomainen materiaali vaihdettavien viestipintojen toteuttamiseen. Uudelleen asennettava, kevytliimainen tarra on helppo asentaa ja irroittaa pitkänkin käyttöajan jälkeen.

INTERCOAT

Kevyellä liimalla varustettu, paloluokiteltu MultiStick on parhaimmillaan myymälämainonnassa ja usein vaihtuvissa kampanjoissa mm. hotelleissa ja ravintoloissa. Voit irroittaa ja asentaa tuotteen useita kertoja uudelleen.

- Mainonta
- Promootiot / tapahtumat
- Sisustaminen / tilauudistukset

MultiStick Decor 1444 - D18

I1444D18137

- 180mic kiiltävä valkoinen monomeerikalvo
- Kirkas uudelleen asennettava akryylipohjainen liima
- Helppo asentaa ja irroittaa
- Erinomainen leikattavuus
- Tulostus: ekoliuotin-, liuotin, HP Latex, UV- tulostimet
- Tulostusmedian ulkoesto: Tulostamattomana 3v
- Paloluokitus: M1
- Rullakoko: 1,372 x30m
- Jätelajittelu: sekajäte

-  Vesipohjainen HP Latex
-  Liuotin / ekoliuotintulostin
-  UV-tulostin
-  Sisäkäyttöön

Testattava ennen varsinaista käyttöä.

Tilaa ja kokeile!

Löydät materiaalin helposti tuotekoodilla.



SERIDECO

Seri-Deco Oy

Jusslansuora 15 04360 Tuusula

Puh. 010 841 8080

myynti@seri-deco.fi

www.seri-deco.fi



Self-adhesive. Quality.

1444-D18-M1

180µ Soft-PVC monomeric , white glossy

Technical Product Information

Grade Characteristics

Description	Self-adhesive monomeric soft-PVC, white glossy, 180 microns		
Application	Digital print vinyl for eco-solvent, solvent, UV-curable and HP latexbased inksystems		
Certificates	REACH conform		
Recommended application temperature	min. + 10°C		
Product application temperature	- 30 to + 90°C		
Durability	3 years *		
Shelf life at 23°C / 50% moisture	2 years in original boxes *		

Physical Properties Facestock	Value	Unit	Norm
Caliper	180 +/- 10	µm	ISO 534
Strech at break md	> 130	%	DIN EN ISO 527
Strech at break cd	> 150	%	DIN EN ISO 527
Tear resistance md	> 19	MPa	DIN EN ISO 527
Tear resistance cd	> 19	MPa	DIN EN ISO 527

Description Adhesive

Ultra-repositionable glue M1: water based acrylic dispersion

Physical Properties Adhesive	Value	Unit	Norm
Adhesion* M1 Ultra-repositionable	< 2	N/25mm	FTM 1
			24h on Glass

Description Liner

D18

siliconised Kraftliner, double-sided PE-coated

Physical Properties Liner	Caliper EN ISO 20 534	Substance ISO 536	Description
D18	0,150mm	140g/m ²	Kraftliner

Warranty

INTERCOAT materials are manufactured according to highest quality standards and pass stringent quality controls prior to despatch. Any material showing an evident defect of manufacturing will be replaced promptly without charge. The wide range of different applications does not allow to test all possibilities of employment. All statements, technical information and recommendations are based on tests and practical experiences and believed to be reliable but do not constitute a guarantee or warranty. Preliminary tests are recommended for each new application. For any need of advise or technical support the INTERCOAT technical department will be pleased to assist.

* Unter Einhaltung der Lager- und Handhabungsgrundsätze. Mitteleuropäisches Normalklima, unbedruckt

16.05.2014

Changes without notice

AMC Panke AG Division Intercoat
Boschstr. 12
D-24568 Kaltenkirchen

Telefon: +49-(0)4191-8005-0
Telefax: +49-(0)4191-2450
Internet: www.intercoat.de

AMC: