

SD MAGNEETTIMATTO 0,35 mm

SD MAGNEETTIMATTO 1,27 X 30 m 0,35 mm (SDMF03530127)

FEATURES AND ADVANTAGES:

- Matte white PVC bonded to magnet sheeting, is compatible for UV curable printing.
- Magnet sheeting is attracted to iron, easy to apply, remove and change, without leaving any residue.
- Without demagnetized, anti-rust


CUSTOMIZED SIZE:

30M×1200/1270×0.35mm total thickness


Size can be customized as require




CONSTRUCTION DRAWING:

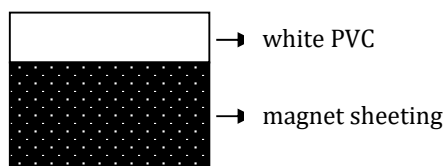

PACKAGING:



3" core



lid-tray box

PRINTING INDEX:

- compatible
- Δ testing required
- × not compatible

(ECO) SOLVENT	UV CURABLE	LATEX	DYE/PIGMENT	OFFSET/FLEXO	SCREEN PRINT	TONER BASED
Δ	○	×	×	Δ	○	×

MAGNETIC DATA:

Pull Strength: [9, 13] g/cm²

Guass: [110, 150] Gs

PHYSICAL DATA:

Total thickness	0.35mm (±0.04)
Weight	980g/M2 (±100)
Opacity	100%
Water resistance	High

PROCESS AND STORAGE:

- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%.
- Application condition: temperature change is within 40°C daily.
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed, and used up within one month.